

BEROTEC

Benutzerhandbuch

User Guide

Manuel d'utilisation

Manuale d'uso

Manual del usuario

FANTIC Caballero | Kennzeichenhalter
2024-

License plate holder

Support de plaque d'immatriculation


Supporto targa

Soporte de matrícula



License plate holder FANTIC Caballero 2024-

1. Remove the original license plate holder
 - » Disconnect all cable connections to the license plate holder
 - » Loosen the two retaining screws on the vehicle and separate the carrier from the mudguard
2. Mounting BEROTEC license plate holders
 - » Run the license plate light cable through the carrier (yellow)
 - » Lay the cable for the indicator (blue)
 - » Insert plastic spacers (red)
 - » Install M6 bolts with flange nuts (green)
 - » Re-connect the cable to the vehicle, mount the license plate holder with M8 screws and washers

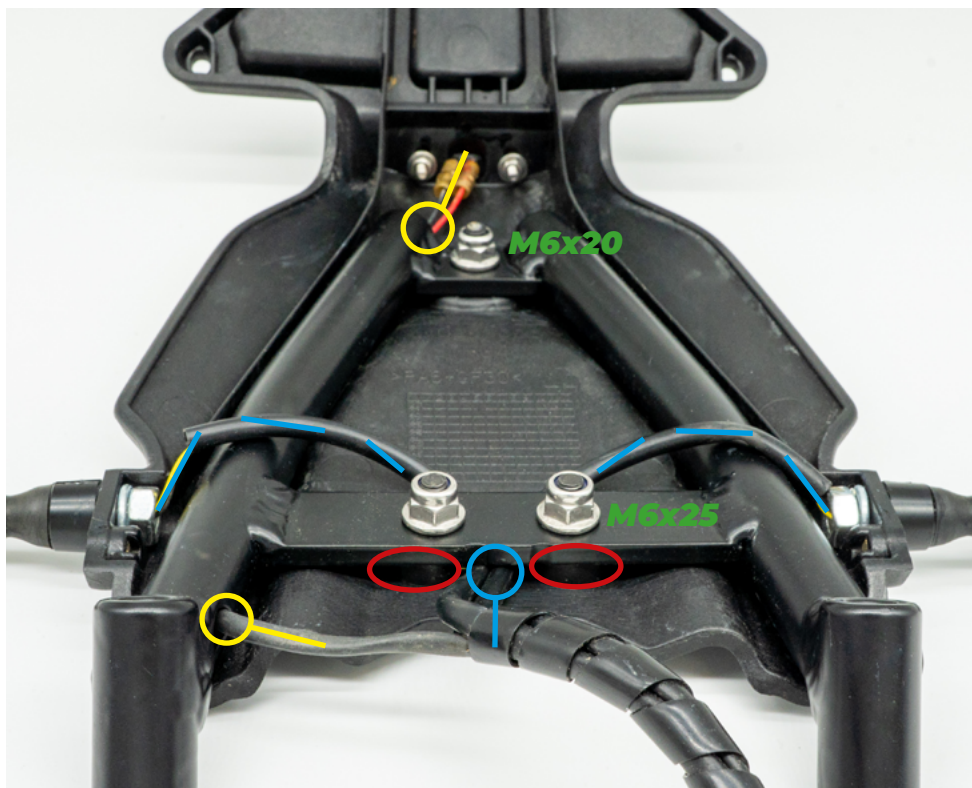



Note: All parts and connections that have been loosened for installation are to be reinstalled according to the vehicle manufacturer's instructions or replaced with the supplied parts. All screw connections must be tightened to the tightening torques specified by the vehicle manufacturer.

Finally, check whether all parts and connections have been properly installed. After the first 50 km, check the entire installation and the correct tightening torques of all screw connections. Carry out visual inspections at regular intervals.

Please observe the maximum permissible speed of 130 km/h.

Scope of delivery:

- 1x BEROTEC license plate holder, aluminum
- 2x M8x50 bolts
- 2x M6x25 screws
- 1x M6x20 bolt
- 3x M6 flange nut, self-locking
- 2x plastic spacers
- 2x washers

BEROTEC GmbH

Gewerbestr. 13
75057 Kürnbach
Deutschland

 +49 7258-2009090
 info@berotec.de
 www.berotec.de

